





Portainsero per troncatura e scanalatura esterna

Portainsero per troncatura e scanalatura esterna con fissaggio a staffa con vite.



| Ricambi | | |
|---------------|------------|------------|
| Inserto | Vite | Chiave |
| LCMF1603../MO | A509694070 | N200050050 |
| LCMF1604../MO | A509694075 | |
| LCMF1603../MO | A509694070 | |


| Codice | € | Tipo | Dimensioni | | | | |
|------------|-----|---------------|-------------------------|--------|---------|--------|--------------|
| | | | Dimensione attacco (mm) | b (mm) | L1 (mm) | S (mm) | Ø D max (mm) |
| A608204000 | --- | GFIR 1616 H03 | 16x16 | 16 | 100 | 3 | 18 |
| A608204005 | --- | GFIL 1616 H03 | 16x16 | 16 | 100 | 3 | 18 |
| A608204030 | --- | GFIR 1616 H04 | 16x16 | 16 | 100 | 4 | 24 |
| A608204035 | --- | GFIL 1616 H04 | 16x16 | 16 | 100 | 4 | 24 |
| A608204040 | --- | GFIR 2020 K04 | 20x20 | 20 | 125 | 4 | 24 |
| A608204045 | --- | GFIL 2020 K04 | 20x20 | 20 | 125 | 4 | 24 |
| A608204050 | --- | GFIR 2525 M04 | 25x25 | 25 | 150 | 4 | 24 |
| A608204055 | --- | GFIL 2525 M04 | 25x25 | 25 | 150 | 4 | 24 |
| A608204175 | --- | GFIR 1616 H03 | 16x16 | 16 | 100 | 3 | 40 |
| A608204180 | --- | GFIL 1616 H03 | 16x16 | 16 | 100 | 3 | 40 |
| A608204185 | --- | GFIR 2020 K03 | 20x20 | 20 | 125 | 3 | 40 |
| A608204190 | --- | GFIL 2020 K03 | 20x20 | 20 | 125 | 3 | 40 |
| A608204195 | --- | GFIR 2525 M03 | 25x25 | 25 | 150 | 3 | 40 |
| A608204200 | --- | GFIL 2525 M03 | 25x25 | 25 | 150 | 3 | 40 |

Ricambi: vedi pag. 529/530/531/532.



Inserto in metallo duro per troncatura e scanalatura

Inserto in metallo duro per operazioni di troncatura e scanalatura di acciai, acciaio inossidabile e ghisa.

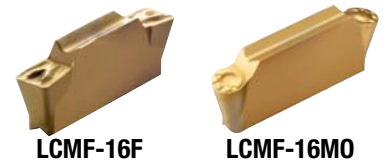

| Codice | € | Pz. | Tipo | Spessore inserto (mm) | P | M | K | N | S | H | |
|------------|-----|-----|-----------------------|-----------------------|-----------|-----------|-----------|-----------|---------|-------|-----------|
| | | | | | Vc m/min. | f mm/U. | ap/mm | Vc m/min. | f mm/U. | ap/mm | Vc m/min. |
| A569694320 | --- | 10 | LCMF 160304-F U 9035 | 3 | 130-250 | 75-150 | 120-235 | - | - | - | |
| | | | | | 0,05-0,17 | 0,05-0,13 | 0,05-0,17 | - | - | - | |
| | | | | | 0,3-3 | 0,3-2,3 | 0,3-3 | - | - | - | |
| A569694323 | --- | 10 | LCMF 1603M0-MP U 9035 | 3 | 130-250 | 75-150 | 120-235 | - | - | - | |
| | | | | | 0,05-0,17 | 0,05-0,13 | 0,05-0,17 | - | - | - | |
| | | | | | 0,3-3 | 0,3-2,3 | 0,3-3 | - | - | - | |
| A569694325 | --- | 10 | LCMF 160404-F U 9035 | 4 | 110-220 | 65-120 | 100-190 | - | - | - | |
| | | | | | 0,08-0,25 | 0,08-0,19 | 0,08-0,25 | - | - | - | |
| | | | | | 0,5-3 | 0,5-2,3 | 0,5-3 | - | - | - | |
| A569694330 | --- | 10 | LCMF 1604M0-MP U 9035 | 4 | 130-240 | 75-140 | 120-225 | - | - | - | |
| | | | | | 0,08-0,25 | 0,08-0,19 | 0,08-0,25 | - | - | - | |
| | | | | | 0,5-3 | 0,5-2,3 | 0,5-3 | - | - | - | |